





BERGAMO	LAF/FLA (mm)							
Roof inclination angle	25°	30°	35°	40°	45°	50°	55°	60°
<b>RIDGE TILE</b>								
LAF	35	30	28	28	28	30	36	38
FLA	83	75	69	63	55	46	36	31

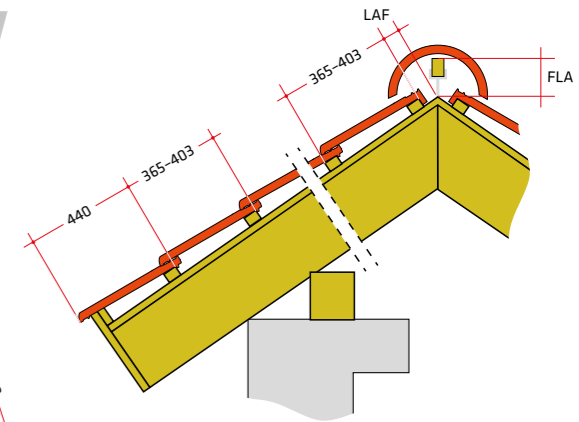

Flat  
time

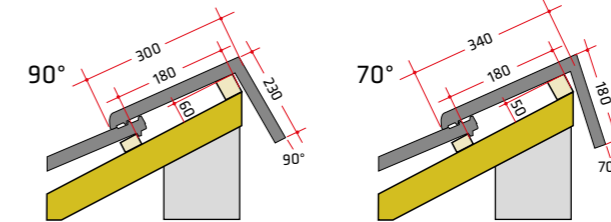

### Cross-section of the roof cover.

Proper assembly depends, inter alia, on the shape of the roof and location of the house, which is why it may be different from the solutions presented here. The best option is to consult a qualified roofer. Please read the guidelines for proper roof ventilation. Details can be found in the information sheets at [www.roben.pl](http://www.roben.pl).

## Available colours of roof tiles

### Technical data\*




Weight (1 item)	ca. 3.95 kg
Total length	ca. 43.6 cm
Total width	ca. 28.5 cm
Length of cover	ca. 33.3–36.1 cm
Average width of cover	ca. 23.7 cm
<b>Minimum design value/m<sup>2</sup></b>	<b>ca. 12 items</b>
Quantity/m <sup>2</sup>	ca. 11.8–12.8 items
Minimum roof inclination angle	up to 25°
Quantity/EURO pallet	240 items
Weight per sqm	ca. 48.5 kg
Weight of full pallet	ca. 975 kg
Frost resistance	yes

\* technical parameters may be slightly changed

### Properties

- perfectly flat roof area
- tight cover thanks to precise interlocks
- possibility of putting roof tiles in a series or with a shift

### BERGAMO / Anthracite slipped

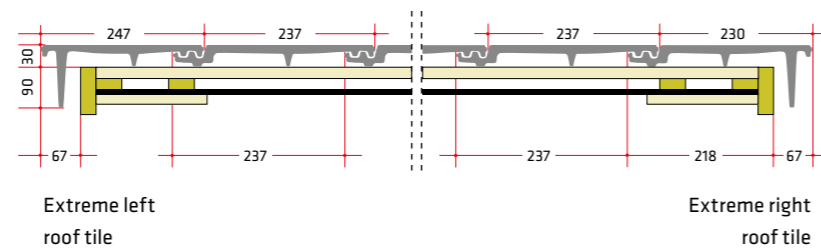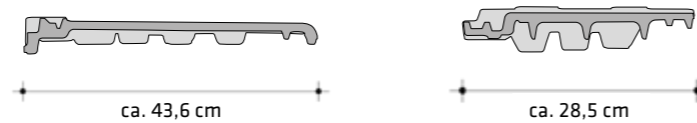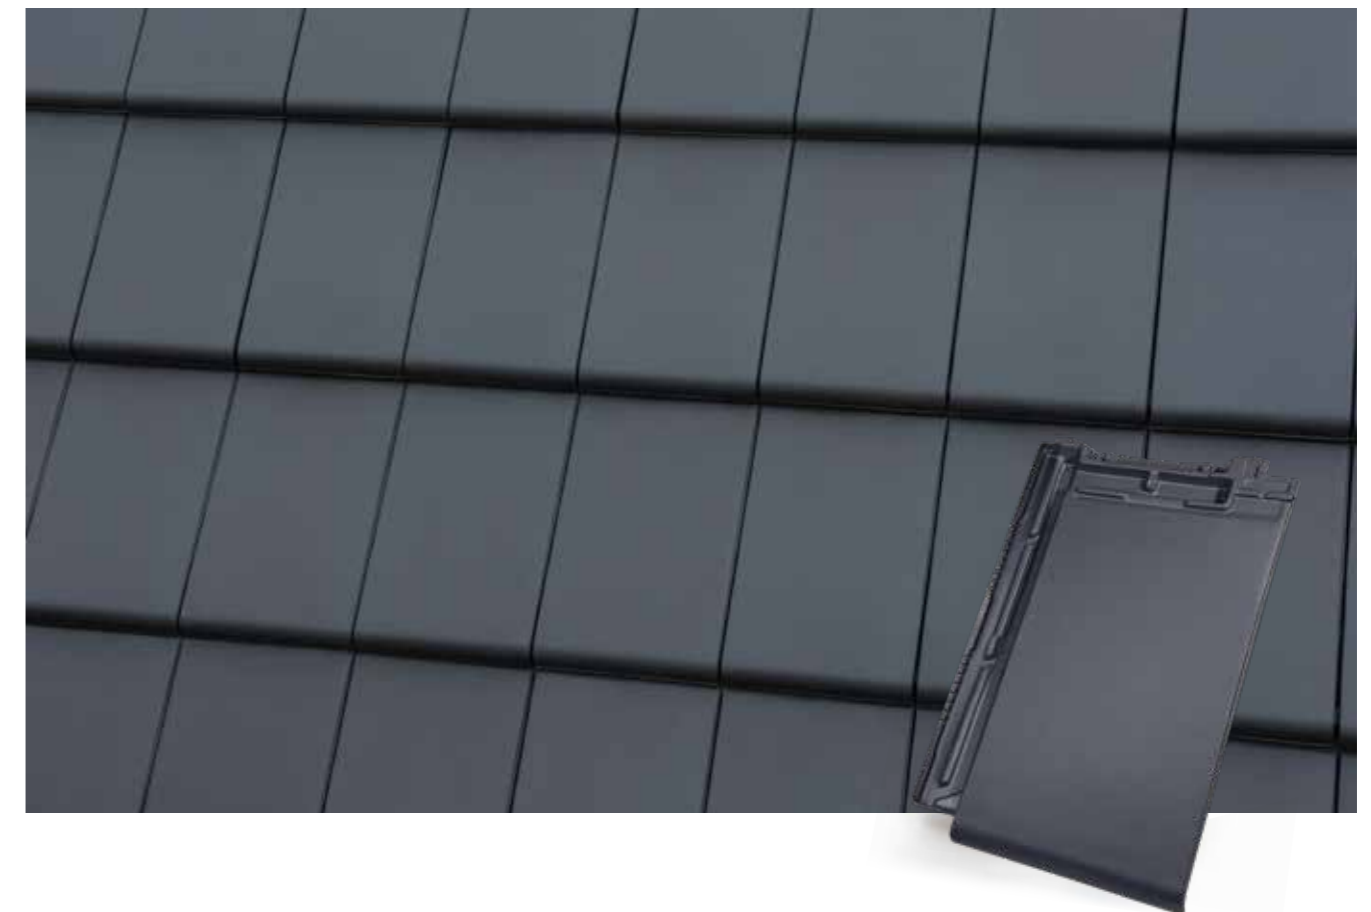

perfectly flat  
roof area